


## Mounting accessories

### Wall holders, made of steel

<b>ZAS 60</b>	218682
<b>ZAS 61</b>	218683
<b>ZAS 62</b>	218685
<b>ZAS 63</b>	218686

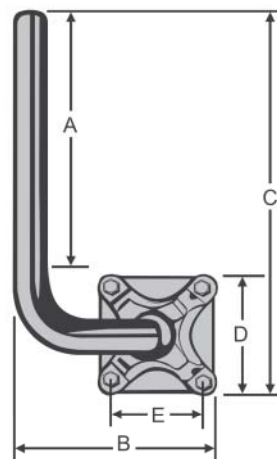

Type			ZAS 60	ZAS 61	ZAS 62	ZAS 63
Order no.			218682	218683	218685	218686
Suitable for parabolic antennas			CAS 60/75	CAS 60/75	CAS 90	CAS 90
Adjustment range of the antenna	Elevation	°	5-45 (CAS 60) 5-50 (CAS 75)	5-45 (CAS 60) 5-50 (CAS 75)	5-50	5-50
	Azimuth	°	± 53 (CAS 60) ± 43 (CAS 75)	± 90	± 45	± 90
Material			Steel, hot-dip galvanised			
A Clamping piece clamp height	mm		205	205	205	205
B Wall distance	mm		175	390	255	500
C Total height	mm		354	383	426	426
D Plate size	mm		130 x 130	160 x 160	222 x 222	222 x 222
E Hole spacing/Ø	mm		103 x 103/11	133 x 133/11	190 x 190/13	190 x 190/13
Pipe-Ø	mm		38	45	50	50
Max. forces exerted on fixing points <sup>1)</sup> pull/pressure CAS 60/CAS 75/CAS 90		N	430/760/-	600/1,000/-	-/-/780	-/-/1,270
Max. forces exerted on fixing points <sup>1)</sup> shearing strain CAS 60/CAS 75/CAS 90		N	420/740/-	330/580/-	-/-/710	-/-/710
Packing unit/weight		pc./kg	1/1.2	1/2.0	1/3.2	1/4.0

<sup>1)</sup> At a dynamic pressure of 800 N/m<sup>2</sup> acc. to EN 60728-11